

AD-A163 860

LASER PROBING ANN MODIFICATION OF MOCVD AND VPE REACTOR 1/1  
KINETICS(U) ILLINOIS UNIV AT URBANA DEPT OF ELECTRICAL  
AND COMPUTER ENGINEERING J G EDEN OCT 85

UNCLASSIFIED

ARO-21933. 1-PH-RI DRAG29-84-G-0007

F/G 20/5


NL

END

FILED

ON

DATE



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS 1963-A

ARO 21933.1-PHRI

(2)

LASER PROBING AND MODIFICATION OF MOCVD AND VPE REACTOR KINETICS

FINAL REPORT

J. G. EDEN

OCTOBER 1985

DTIC  
SELECTE  
FEB 10 1986  
S D

Dr. B. D. Guenther  
Physics Division  
U. S. Army Research Office  
P. O. Box 12211  
Research Triangle Park, NC 27709-2211

Contract No. DAAG 29-84-G-0007

Department of Electrical and Computer Engineering  
University of Illinois at Urbana-Champaign  
1406 W. Green St.  
Urbana, IL 61801

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED.

AD-A163 860

DTIC FILE COPY

86 2 7 277

THE VIEW, OPINIONS, AND/OR FINDINGS CONTAINED IN THIS REPORT ARE  
THOSE OF THE AUTHOR(S) AND SHOULD NOT BE CONSTRUED AS AN OFFICIAL  
DEPARTMENT OF THE ARMY POSITION, POLICY, OR DECISION, UNLESS SO  
DESIGNATED BY OTHER DOCUMENTATION.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER <b>ARO 21933.1-PH-RI</b>	2. GOVT ACCESSION NO. N/A <b>AD-A163960</b>	3. RECIPIENT'S CATALOG NUMBER N/A
4. TITLE (and Subtitle) LASER PROBING AND MODIFICATION OF MOCVD AND VPE REACTOR KINETICS		5. TYPE OF REPORT & PERIOD COVERED FINAL REPORT <b>31 Dec</b> 1 July 1984-30 June 1985
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) J. G. EDEN		8. CONTRACT OR GRANT NUMBER(s) DAAG 29-84-G-0007
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of Elec. and Computer Engg. Univ. of Illinois at Urbana-Champaign 1406 W. Green St., Urbana, IL 61801		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS  N/A
11. CONTROLLING OFFICE NAME AND ADDRESS U. S. Army Research Office Post Office Box 12211 Research Triangle Park, NC 27709		12. REPORT DATE October 1985
		13. NUMBER OF PAGES 10
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)  Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)  NA		
18. SUPPLEMENTARY NOTES  The view, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)  laser, visible, tunable, mercury bromide, dye vapor, optically pumped.		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number)  Experiments are described in which the potential of dye vapor and HgBr as tunable visible lasers is under investigation. A near UV optically pumped HgBr laser has been demonstrated and transient excited-state absorption in HgBr' has been observed. Intense stable discharges in POPOP and coumarin 6 vapor have been obtained and gain measurements are underway.		

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

# FINAL REPORT

1. ARO PROPOSAL NUMBER: 20002-PH
2. PERIOD COVERED BY REPORT: 1 July 1984 - 30 June 1985
3. TITLE OF PROPOSAL: Laser Probing and Modification of MOCVD and VPE Reactor Kinetics
4. CONTRACT OR GRANT NUMBER: DAAG 29-84-G-0007
5. NAME OF INSTITUTION: University of Illinois
6. AUTHORS OF REPORT: J. G. Eden
7. LIST OF MANUSCRIPTS SUBMITTED OR PUBLISHED UNDER ARO SPONSORSHIP DURING THIS REPORTING PERIOD, INCLUDING JOURNAL REFERENCES:

D. P. Greene and J. G. Eden, "Injection locking and saturation intensity of a cadmium iodide laser," Opt. Lett. 10, pp. 59-61 (1985).

D. P. Greene and J. G. Eden, "Origin of the 454 nm bound + free absorption band of cadmium monoiodide ( $^{114}\text{CdI}$ )," J. Chem. Phys. 82, pp. 702-708 (1985).

J. G. Eden (Book Review), J. Opt. Soc. Am. B 2, p. 390 (1985).

D. P. Greene and J. G. Eden, "Transient absorption in a cadmium monoiodide laser discharge," Opt. Comm. 53, pp. 263-268 (1985).

D. P. Greene, K. P. Killeen and J. G. Eden, " $X^2\Sigma + B^2\Sigma$  absorption band of HgBr: Optically-pumped 502 nm laser," (submitted to Applied Physics Letters).

8. SCIENTIFIC PERSONNEL SUPPORTED BY THIS PROJECT AND DEGREES AWARDED DURING THIS REPORTING PERIOD:

J. G. Eden, K. P. Killeen

Degrees Awarded: D. P. Greene, Ph.D. in Electrical Engineering, January, 1985.

K. P. Killeen, Ph.D. in Electrical Engineering, October, 1985.

J. G. Eden  
Department of Electrical and Computer Engineering  
University of Illinois  
Urbana, IL 61801



Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

## I. INTRODUCTION

Over the last two years, the Army Research Office has supported experimental work in laser physics here at the University of Illinois. The goal of this research program is two-fold: 1) to develop new sources of tunable coherent radiation in the visible and ultraviolet and 2) to better understand the fundamental processes occurring in existing sources and particularly those that show promise for improvement in efficiency and output power.

This work has proven to be very fruitful in both areas. Specifically, the following accomplishments have been realized in the last year alone:

- 1) Stable, streamer-free discharges have been obtained in coumarin 6 and POPOP vapors - glows have been sustained at PRF's of 1-5 Hz for several hours with no noticeable deterioration in fluorescence intensity from the active region.
- 2) Excited state absorption of the cadmium monoiodide (CdI) and mercury-bromide (HgBr) molecules has been observed and spectroscopically assigned for the first time.
- 3) The  $X \rightarrow B$  absorption band of HgBr has been observed.
- 4) An HgBr laser at 502 nm, optically pumped at 351 nm (XeF) or 355 nm (3 X Nd:YAG), has been demonstrated.
- 5) A flashlamp-pumped HgBr laser has been demonstrated.

## II. DESCRIPTION OF EXPERIMENTAL RESULTS

### A. HgBr Excited State Absorption

Recent experiments have involved an HgBr laser in which we have observed the analogous excited state (charge transfer) band as that observed previously for CdI. In HgBr, this absorption peaks near 447 nm. Figure 1 shows an expanded view of the blue absorption spectrum superimposed on the HgBr B  $\rightarrow$  X fluorescence profile. An aside that is important insofar as tunable lasers are concerned is that, at the same time these measurements were made, we discovered that the HgBr B  $\rightarrow$  X band exhibits gain as far to the blue as 469 nm! Therefore, this oscillator is potentially tunable over as much as  $\sim 30$  nm.

The identity of the HgBr blue band was also confirmed by exciting the active medium with a dye laser pulse of wavelength  $444 \leq \lambda \leq 454$  nm while at the same time monitoring the gain at 502 nm (peak of B  $\rightarrow$  X band). As shown by Figure 2, when the wavelength of the first dye laser pulse coincided with one of the absorption peaks of Figure 1, a strong suppression in the 502 nm gain waveform was observed. At other wavelengths (between the absorption peaks or outside the band), little or no effect on the 502 nm gain was detectable. Of course, the strongest suppression was observed when  $\lambda = 446.98$  nm and the gain suppression at other absorption peaks is proportional to the absorption strength.

By varying the laser fluence at  $\lambda \sim 447$  nm and measuring the transmitted blue intensity, the "saturation intensity" of the HgBr excited



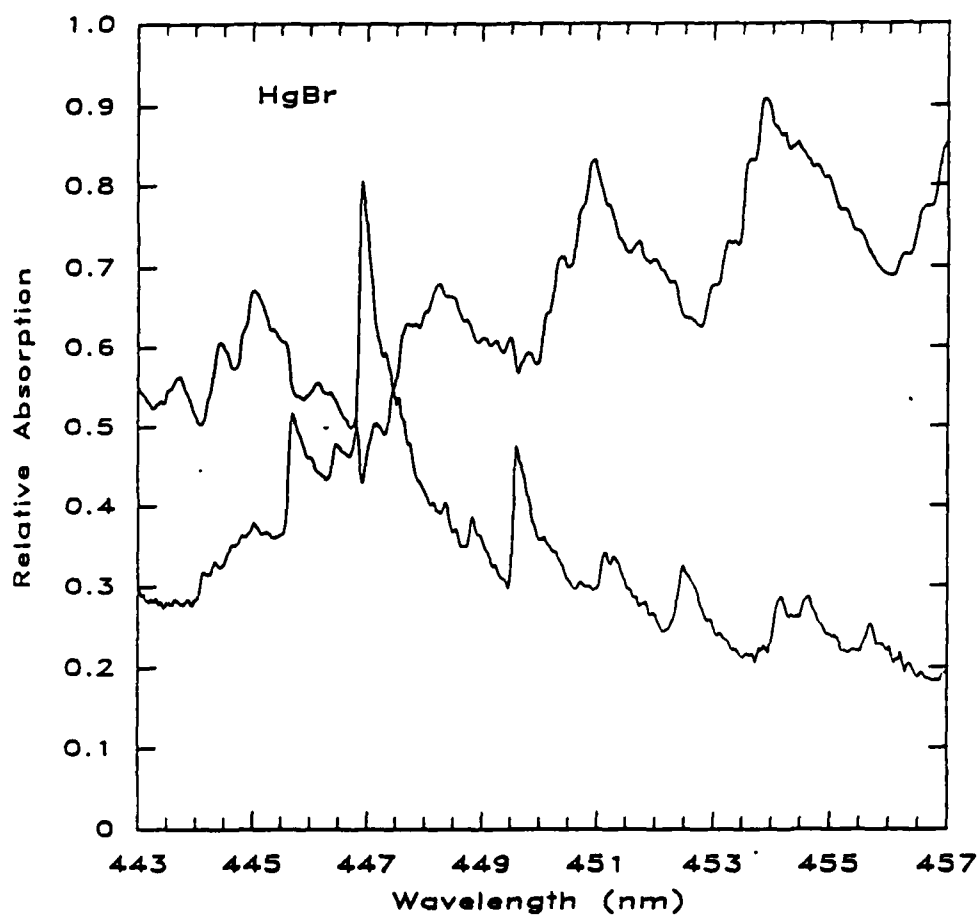


Figure 1. HgBr (B + X) fluorescence spectrum (top trace) overlapped with the HgBr\* (B) absorption spectrum (bottom).

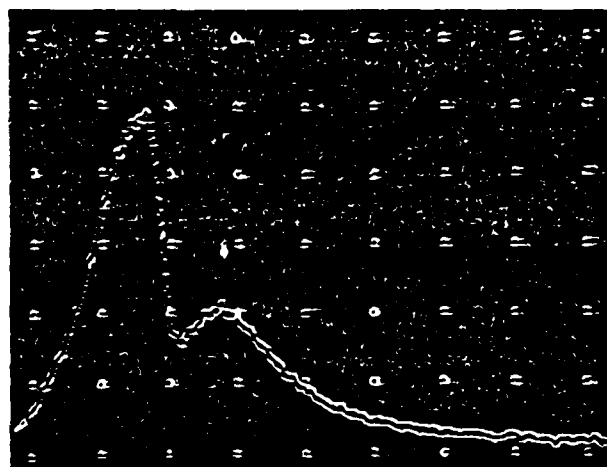
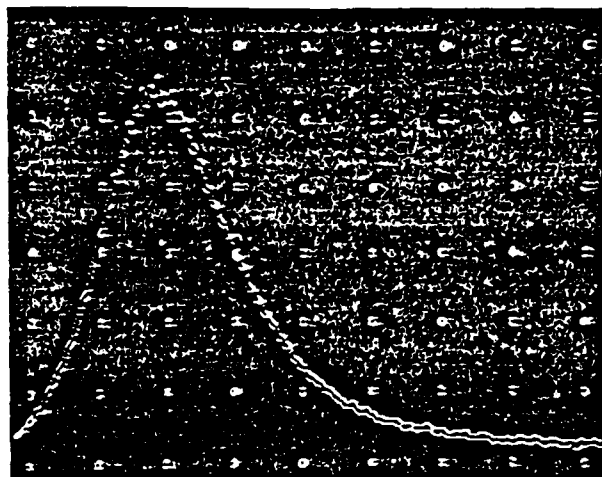


Figure 2. (Top) Gain at 502 nm in HgBr laser discharge; (Bottom) Suppression of gain when laser plasma is irradiated at 446.98 nm. Peak suppression is 70% and the dye laser pulse was timed to arrive at the point of peak gain. Time base: 50 ns/div.

state absorption band was measured to be  $710 \text{ kW} \cdot \text{cm}^{-2}$ . Similarly, the absorption cross-section at  $446.98 \text{ nm}$  is  $3 \cdot 10^{-17} \text{ cm}^2$ . Finally, it should be mentioned that the structure of the band shown in Figure 1 is consistent with an HgBr absorption band originating from the B state - the energy spacing between alternate peaks in Figure 1 is close to the known  $\omega_e$  for  $B^2\Sigma(\sim 139 \text{ cm}^{-1})$ .

We conclude that excited state absorption in CdI and HgBr has been observed for the first time though the existence of such bands had been predicted theoretically for at least a decade. These results are currently being written up for publication and will be submitted to the Journal of Chemical Physics.

#### B. Optically Pumped HgBr Laser

In the last six months, we have uncovered a simple and efficient way to pump the HgBr laser - a method which we believe is amenable to CW operation. In the course of examining the transient absorption spectrum for the HgBr discharge laser, we unexpectedly observed the HgBr  $X \rightarrow B$  absorption band. Figure 3 shows the  $X \rightarrow B$  absorption spectrum of HgBr that was measured with a pulsed lamp and OMA in the afterglow of a discharge pumped HgBr laser based on dissociation of  $\text{HgBr}_2$ .

Because of the relatively low photon energies required to access the  $B^2\Sigma$  state from ground ( $\sim 3.5 \text{ eV}$ ), one can quickly envision an optically-pumped HgBr laser having a high quantum efficiency ( $2.5 \text{ eV}/3.5 \text{ eV} = 71\%$ ). Preliminary experiments to explore this possibility have been conducted. An  $\sim 8 \text{ ns}$  pulse from a frequency tripled, Q-switched Nd:YAG ( $\lambda = 355 \text{ nm}$ ) or XeF laser was directed along the axis of a discharge-pumped HgBr laser

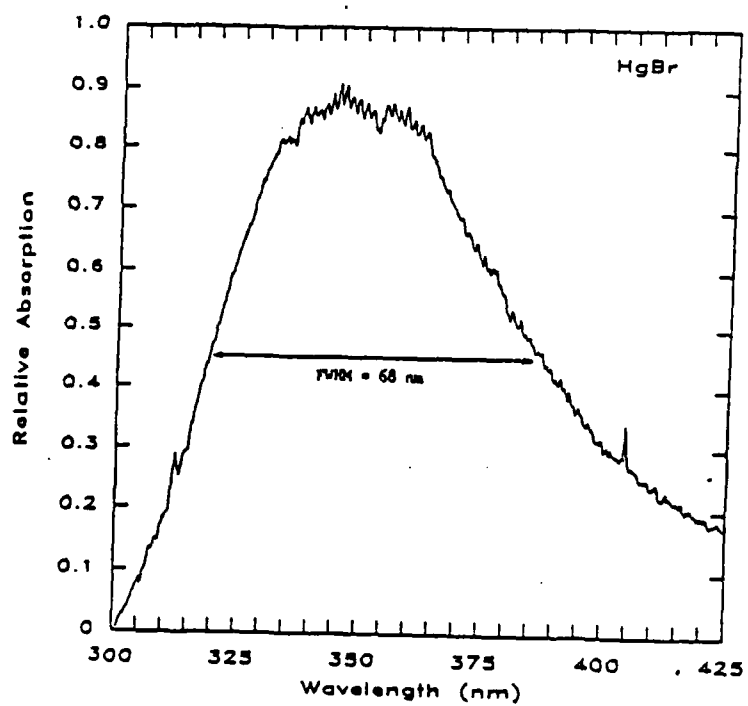


Figure 3. Ground state HgBr absorption spectrum in the near-ultraviolet that was recorded in the afterglow of a pulsed HgBr laser discharge.

(active length of 50 cm He/N<sub>2</sub>/HgBr<sub>2</sub> gas mixture). Fired by itself, the discharge produces an ~ 40 ns FWHM HgBr laser pulse. Once the 355 nm laser pulse arrives, a second HgBr pulse is generated having a width of ~ 10 ns. The efficiency for converting XeF radiation ( $\lambda = 351$  nm) into blue-green output is 23% which corresponds to a photon conversion efficiency of approximately 1/3. These data are extremely reproducible.

The obvious match between the peak in the X  $\rightarrow$  B absorption spectrum of Figure 3 and the spectral output of a xenon flashlamp prompted us to explore the possibility of a pulsed, coaxial flashlamp-pumped HgBr laser. Several milligrams of natural abundance HgBr<sub>2</sub> and 760 Torr of argon buffer gas were contained in a quartz cell having Suprasil quartz Brewster windows. Lasing was obtained with a high-Q cavity (1% output coupling) - larger couplings have not yet been tried. A pulse of ~ 280 ns FWHM is produced.

### C. Dye Vapor Experiments

One of the major objectives of this research program when it was proposed to ARO two years ago was to explore the possibility of a discharge-pumped dye vapor laser. At that time, it was noted that short discharge current risetimes and the proper choice of dye would be essential to minimizing dye fragmentation.

Since then, considerable progress has been made towards this goal. Intense, stable, streamer-free, glow discharges have been obtained in both POPOP and coumarin 6 dye vapor. We consider this alone to be a significant development since the discharge current pulsewidth is 50-80 ns, depending on the buffer gas pressure. At the present time, the discharge cell has

the following parameters: current risetime - 50 ns, approximate specific power loading at 1 atm -  $2 \text{ to } 5 \text{ MW} \cdot \text{cm}^{-3}$ , equivalent series inductance - 85 nH and an active volume of  $10 \text{ cm}^3$ .

One of our most significant observations is that even for specific power loadings of  $\sim 5 \text{ MW} \cdot \text{cm}^{-3}$ , dye fragmentation is not a serious problem. At a pulse repetition frequency of 1 Hz, the discharge has been operated for several hours without a noticeable deterioration in the fluorescence intensity from the excited dye vapor.

The brightness of the discharges in both POPOP and coumarin 6 vapors prompted us to make a preliminary search for gain. However, the only laser probe source available in our laboratory (until recently) is an  $\text{Ar}^+$  ion laser. Therefore, to date, gain measurements have only been carried out at 457.9, 476.5, 488.0 and 514.4 nm in coumarin vapor at  $\approx 270^\circ\text{C}$  (coumarin number density  $\sim 3 \cdot 10^{16} \text{ cm}^{-3}$ ). At these wavelengths, only optical loss is observed which is not surprising since gain would only be expected to exist in the  $\sim 525\text{-}550 \text{ nm}$  spectral region.

Therefore, the possible presence of gain in the system is inconclusive and it will be necessary to measure the entire gain absorption spectra of these molecules using an optical multichannel analyzer (OMA) or a CW dye laser.

**END**

**FILMED**

**3-86**

**DTIC**